




clip-on

WITH GRIPPING LANCES. For certain applications where the direction of contact engagement requires orientation in the opposite direction from standard clip-ons. Grips a wide range of panel thicknesses. Includes standard retaining lances.

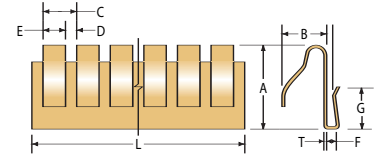

Part Number		A	B	C	D	E	F	G	T	L	Distance Between Lances	Number of (ref.) Fingers
Bright Copper	Tin Plated											
SG805605CU	SG805605SN	.380 9,7	.200 5,1	.250 6,4	.040 1,0	.210 5,4	.070 1,8	.380 7,6	.005 0,13	16.0 406,0	.500 12,7	64